arXiv:1110.1294v1 [physics.flu-dyn] 6 Oct 2011

Steady streaming in a channel with permeable walls

Konstantin Ilin[1]

Department of Mathematics, University of York, Heslington, York, YO10 5DD, UK

Abstract

We study steady streaming in a channel between two parallel permeable walls induced by oscillating (in time) blowing/suction at the walls. We obtain an asymptotic expansion of the solution of the Navier-Stokes equations in the limit when the amplitude of the normal displacements of fluid particles near the walls is much smaller that both the width of the channel and the thickness of the Stokes layer. It is demonstrated that the magnitude of the steady streaming is much bigger than the corresponding quantity in the case of the steady streaming produced by vibrations of impermeable boundaries.

1 Introduction

It is well-known that an oscillating (in time) body force or vibrations of the boundary of a domain occupied by a viscous fluid can produce not only an oscillating flow but also a (relatively) weak steady flow, which is usually called steady streaming (see Lighthill, 1978; Riley, 1967, 2001). In this paper, we present a theory of steady streaming in a channel with fixed but permeable walls produced by given velocity at the walls which is oscillating in time with angular frequency ω. The basic parameters of the problem are the inverse Strouhal number ϵ^2 and the inverse Reynolds number ν, defined by

$$\epsilon^2 = \frac{1}{St} = \frac{V_0^*}{\omega d}, \quad \nu = \frac{1}{Re} = \frac{\nu^*}{V_0^* d} \tag{1.1}$$

where V_0^* is the amplitude of the oscillating velocity at the walls, d is the distance between the walls and ν^* is the kinematic viscosity of the fluid. Parameter ϵ^2 measures the ratio of the amplitude of the displacements of fluid particles in an oscillating velocity field with amplitude V_0^* to the distance between the walls. Another dimensionless parameter which is widely used in literature is the 'streaming Reynolds number' $R_s = V_0^{*2}/\omega\nu^*$. In terms of parameters ϵ and ν, $R_s = \epsilon^2/\nu$. We are interested in the asymptotic behaviour of solutions of the Navier-Stokes equations in the limit $\epsilon \ll 1$ and $\nu \sim 1$. This means that the amplitude of displacements of fluid particles is much smaller than the thickness of the Stokes layer. Note that this limit corresponds to small R_s ($R_s \sim \epsilon^2 \ll 1$).

Early studies of the steady streaming in a channel induced by vibrations of the walls had been focused on the problem of peristaltic pumping in channels and pipes under the assumption of low Reynolds numbers ($R \ll 1$) and small amplitude-to-wavelength ratio (see, e.g., Jaffrin & Shapiro, 1971; Wilson & Panton, 1979). In recent years, there had been considerable renewed interest in the problem motivated by possible applications of steady streaming to micro-mixing (Selverov & Stone, 2001; Yi, Bau, & Hu, 2002; Carlsson, Sen & Löfdahl, 2005) and to drag reduction in channel flows (Hœpffner & Fukagata, 2009). In all asymptotic theories of the steady streaming produced by vibrating impermeable boundaries, the magnitude of steady streaming is $O(\epsilon^2)$ for $\epsilon \ll 1$. This is because steady streaming results from the nonlinearity in the Navier-Stokes equations and parameter ϵ^2 measures the magnitude of the nonlinear term. The aim of the present study is to show that if the boundary is permeable, then the magnitude of steady streaming is $O(\epsilon)$ for small ϵ, i.e. much bigger than in the case of an impermeable boundary.

To obtain an asymptotic expansion, we employ the Vishik-Lyusternik method (see, e.g., Trenogin, 1970; Nayfeh, 1973). It is described in detail in Ilin & Sadiq (2010).

---

[1] Email address: konstantin.ilin@york.ac.uk

The outline of the paper is as follows. In Section 2, we formulate the mathematical problem. In Section 3, the asymptotic expansion of the solution is described. In Section 4, we consider simple examples in which the leading order asymptotic solution can be obtained analytically. Finally, conclusions are presented in Section 5.

2 Formulation of the problem

We consider a two-dimensional viscous incompressible flow in an infinite channel of width d. The walls of the channel are permeable for the fluid, and the flow is produced by a given velocity at the walls which is assumed to be periodic along the channel with period L^* and oscillating in time with angular frequency ω. We will use the following non-dimensional quantities:

$$\tau = \omega t^*, \quad \mathbf{x} = \frac{\mathbf{x}^*}{d}, \quad \mathbf{v} = \frac{\mathbf{v}^*}{V_0^*}, \quad p = \frac{p^*}{\rho d \omega V_0^*}.$$

Here t^* is time; $\mathbf{x}^* = (x^*, y^*)$; x^* and y^* are Cartesian coordinates, the x^* axis being parallel to the channel; $\mathbf{v}^* = (u^*, v^*)$ is the velocity of the fluid; p^* is the pressure; ρ is the density; V_0^* is the maximum of the given velocity at the walls over all x^* and t^*. In these variables, the Navier-Stokes equations take the form

$$\mathbf{v}_\tau + \epsilon^2 (\mathbf{v} \cdot \nabla)\mathbf{v} = -\nabla p + \epsilon^2 \nu \nabla^2 \mathbf{v}, \quad \nabla \cdot \mathbf{v} = 0, \tag{2.1}$$

where the dimensionless parameters ϵ^2 and ν are defined by Eq. (1.1). Equations (2.1) are to be solved subject to the boundary conditions

$$\mathbf{v}|_{y=0} = \mathbf{V}^a(x, \tau, \epsilon), \quad \mathbf{v}|_{y=1} = \mathbf{V}^b(x, \tau, \epsilon). \tag{2.2}$$

Here $\mathbf{V}^a = (U^a, V^a)$ and $\mathbf{V}^b = (U^b, V^b)$ are given functions which are 2π-periodic in τ and have zero mean value:

$$\bar{\mathbf{V}}^a \equiv \frac{1}{2\pi} \int_0^{2\pi} \mathbf{V}^a(x, \tau)\, d\tau = 0, \quad \bar{\mathbf{V}}^b \equiv \frac{1}{2\pi} \int_0^{2\pi} \mathbf{V}^b(x, \tau)\, d\tau = 0. \tag{2.3}$$

They are also periodic in x with period $L = L^*/d$ and satisfy the condition

$$\int_0^L V^a(x, \tau)\, dx = \int_0^L V^b(x, \tau)\, dx \tag{2.4}$$

which follows from incompressibility of the fluid. In what follows we are interested in the asymptotic behaviour of periodic (both in τ and x) solutions of Eqs. (2.1), (2.2) in the limit $\epsilon \to 0$ and $\nu = O(1)$. We assume that $\mathbf{V}^{a,b}(x, \tau, \epsilon)$ can be presented in the form

$$\mathbf{V}^{a,b}(x, \tau, \epsilon) = \mathbf{V}_0^{a,b}(x, \tau) + \epsilon\, \mathbf{V}_1^{a,b}(x, \tau) + \epsilon^2 \mathbf{V}_2^{a,b}(x, \tau) + \dots \tag{2.5}$$

We seek a solution of (2.1), (2.2) in the form

$$u = u^r + u^a + u^b, \quad v = v^r + \epsilon\, v^a + \epsilon\, v^b, \quad p = p^r + p^a + p^b. \tag{2.6}$$

Here u^r, v^r, p^r are functions of x, y, τ and ϵ; u^a, v^a, p^a depend on x, τ, ϵ and the boundary layer variable $\xi = y/\epsilon$; u^b, v^b, p^b depend on x, τ, ϵ and the boundary layer variable $\eta = (1-y)/\epsilon$. Functions u^r, v^r, p^r represent a regular expansion of the solution in power series in ϵ (an outer solution), and (u^a, v^a, p^a) and (u^b, v^b, p^b) correspond to boundary layer corrections to this regular expansion (inner solutions). We assume that the boundary layer parts of the expansion rapidly decay outside thin boundary layers:

$$u^a, v^a, p^a = o(\xi^{-s}) \quad \text{as} \quad \xi \to \infty \quad \text{and} \qquad u^b, v^b, p^b = o(\eta^{-s}) \quad \text{as} \quad \eta \to \infty \tag{2.7}$$

for every $s > 0$. This assumption will be verified *a posteriori*.

3 Asymptotic expansion

3.1 Regular part of the expansion

Let

$$\mathbf{v}^r = \mathbf{v}_0^r + \epsilon\,\mathbf{v}_1^r + \epsilon^2\mathbf{v}_2^r + \dots, \quad p^r = p_0^r + \epsilon\, p_1^r + \epsilon^2 p_2^r + \dots, \tag{3.1}$$

where $\mathbf{v}^r = (u^r, v^r)$, $\mathbf{v}_k^r = (u_k^r, v_k^r)$ $(k = 0, 1, 2, \dots)$. The successive approximations $\mathbf{v}_k^r$, p_k^r $(k = 0, 1, 2, \dots)$ satisfy the equations:

$$\partial_\tau \mathbf{v}_k^r = -\nabla p_k^r + \mathbf{F}_k, \quad \nabla\cdot\mathbf{v}_k^r = 0, \tag{3.2}$$

where $\mathbf{F}_0 \equiv 0$, $\mathbf{F}_1 \equiv 0$ and

$$\mathbf{F}_k = -\sum_{l=0}^{k-2} (\mathbf{v}_l^r\cdot\nabla)\mathbf{v}_{k-2-l}^r + \nu\nabla^2\mathbf{v}_{k-2}^r \tag{3.3}$$

for $k \geq 2$. In what follows, we will use the following notation: for any 2π-periodic $f(\tau)$,

$$f(\tau) = \bar{f} + \tilde{f}(\tau), \quad \bar{f} = \frac{1}{2\pi}\int\limits_0^{2\pi} f(\tau)d\tau \tag{3.4}$$

where $\bar{f}$ is the mean value of $f(\tau)$ and, by definition, $\tilde{f}(\tau) = f(\tau) - \bar{f}$.

3.1.1 Leading-order equations

A general solution of Eqs. (3.2) for $k = 0$, which is periodic in τ, can be written as

$$\mathbf{v}_0^r = \bar{\mathbf{v}}_0^r + \tilde{\mathbf{v}}_0, \quad \tilde{\mathbf{v}}_0^r = \nabla\phi_0 \tag{3.5}$$

where ϕ_0 has zero mean value and is the solution of the boundary value problem

$$\nabla^2\phi_0 = 0, \quad \phi_{0y}|_{y=0} = V_0^a(x,\tau), \quad \phi_{0y}|_{y=1} = V_0^b(x,\tau), \quad \phi_0(x+L, y) = \phi_0(x,y). \tag{3.6}$$

The boundary conditions at $y = 0$ and $y = 1$ in (3.6) will be justified later.

On averaging the equation for $\mathbf{v}_2^r$ (the first equation (3.2) for $k = 2$) and the incompressibility condition for $\mathbf{v}_0^r$ and using the fact that $\tilde{\mathbf{v}}_0^r$ is irrotational, we obtain

$$(\bar{\mathbf{v}}_0^r\cdot\nabla)\bar{\mathbf{v}}_0^r = -\nabla\Pi_0 + \nu\nabla^2\bar{\mathbf{v}}_0^r, \quad \nabla\cdot\bar{\mathbf{v}}_0^r = 0, \tag{3.7}$$

where $\Pi_0 = \bar{p}_2^r + \overline{|\nabla\phi_0|^2/2}$. Equations (3.7) represent the time-independent Navier-Stokes equations. It will be shown later that boundary conditions for $\bar{\mathbf{v}}_0^r$ are

$$\bar{\mathbf{v}}_0^r|_{y=0} = \bar{\mathbf{v}}_0^r|_{y=1} = \mathbf{0}. \tag{3.8}$$

The only solution of (3.7) that is periodic in x and satisfies (3.8) is zero solution:

$$\bar{\mathbf{v}}_0^r \equiv \mathbf{0}. \tag{3.9}$$

This means that there is no steady streaming in the leading order of the expansion.

3.1.2 First-order equations

The solution of Eqs. (3.2) for $k = 1$ can be written as

$$\mathbf{v}_1^r = \bar{\mathbf{v}}_1^r + \tilde{\mathbf{v}}_1, \quad \tilde{\mathbf{v}}_1^r = \nabla\phi_1 \tag{3.10}$$

where ϕ_1 has zero mean value and is the solution of the boundary value problem

$$\nabla^2\phi_1 = 0, \quad \phi_{1y}|_{y=0} = a_1(x,\tau), \quad \phi_{1y}|_{y=1} = b_1(x,\tau), \quad \phi_1(x+L,y) = \phi_1(x,y). \tag{3.11}$$

Functions $a_1(x,\tau)$ and $b_1(x,\tau)$ will be defined later.

To obtain equations for $\bar{\mathbf{v}}_1^r(\mathbf{x})$, we average the incompressibility condition for $\bar{\mathbf{v}}_1^r$ and the equation for $\mathbf{v}_3^r$ (the first equation (3.2) for $k = 3$) and then take account of Eq. (3.9) and the fact that $\tilde{\mathbf{v}}_0^r$ and $\tilde{\mathbf{v}}_1^r$ are both irrotational. This yields

$$\mathbf{0} = -\nabla\Pi_1 + \nu\nabla^2\bar{\mathbf{v}}_1^r, \quad \nabla\cdot\bar{\mathbf{v}}_1^r = 0. \tag{3.12}$$

where $\Pi_1 = \bar{p}_3^r + \overline{(\nabla\phi_0\cdot\nabla\phi_1)}$. Thus, the first order averaged outer flow is described by the Stokes equations. Boundary conditions for $\bar{\mathbf{v}}_1^r$ will be specified later.

3.2 Boundary layers near the walls at $y = 0$ and $y = 1$

3.2.1 Boundary layer equations

To derive boundary layer equations near the bottom wall, we ignore u^b, v^b and p^b, because they are supposed to be small everywhere except a thin boundary layer near $y = 1$, and assume that

$$u = u_0^r + u_0^a + \epsilon(u_1^r + u_1^a) + \dots, \quad v = v_0^r + \epsilon(v_1^r + v_0^a) + \dots, \quad p = p_0^r + p_0^a + \epsilon(p_1^r + p_1^a) + \dots \tag{3.13}$$

We substitute these into Eq. (2.1) and take into account that u_k^r, v_k^r, p_k^r satisfy (3.2). Then we make the change of variables $y = \epsilon\,\xi$, expand every function of $\epsilon\,\xi$ in Taylor's series at $\epsilon = 0$ and collect terms of the equal powers in ϵ. As a result, we obtain

$$u_{k\tau}^a + p_{kx}^a - \nu u_{k\xi\xi}^a = F_k^a, \quad p_{k\xi}^a = G_k^a, \quad u_{kx}^a + v_{k\xi}^a = 0 \tag{3.14}$$

for $k = 0, 1, \dots$ In Eqs. (3.14), functions F_k^a and G_k^a depend on $\mathbf{v}_0^r, \dots, \mathbf{v}_{k-1}^r$, $u_0^a, \dots, u_{k-1}^a$, $v_0^a, \dots, v_{k-1}^a$. For $k = 0, 1$, these are given by

$$F_0^a = 0, \quad F_1^a = -V_0^a(x,\tau)u_{0\xi}^a, \quad G_0^a = 0, \quad G_1^a = 0. \tag{3.15}$$

A similar procedure leads to the equations of the boundary layer near the upper wall:

$$u_{k\tau}^b + p_{kx}^b - \nu u_{2\eta\eta}^b = F_k^b, \quad p_{k\eta}^b = -G_k^b, \quad u_{kx}^b - v_{k\eta}^b = 0 \tag{3.16}$$

for $k = 0, 1, \dots$. Functions F_k^b and G_k^b for $k = 0, 1$ are given by

$$F_0^b = 0, \quad F_1^b = V_0^b(x,\tau)u_{0\eta}^b, \quad G_0^b = 0, \quad G_1^b = 0. \tag{3.17}$$

Before we describe how the above boundary layer equations can be solved, we need to discuss boundary conditions that must be satisfied by terms of each order in our asymptotic expansion.

3.2.2 Boundary conditions

In view of (2.7), we require that for every $s > 0$ and for each $k = 0, 1, \dots,$

$$u_k^a, v_k^a, p_k^a = o(\xi^{-s}) \quad \text{as} \quad \xi \to \infty \quad \text{and} \qquad u_k^b, v_k^b, p_k^b = o(\eta^{-s}) \quad \text{as} \quad \eta \to \infty. \tag{3.18}$$

Now we substitute (3.13) into the first Eq. (2.2) and collect terms of equal powers in ϵ. This leads to the following boundary conditions at $y = 0$:

$$u_0^r\Big|_{y=0} + u_0^a\Big|_{\xi=0} = U_0^a(x,\tau), \quad v_0^r\Big|_{y=0} = V_0^a(x,\tau), \tag{3.19}$$

$$u_k^r\Big|_{y=0} + u_k^a\Big|_{\xi=0} = U_k^a(x,\tau), \quad v_k^r\Big|_{y=0} + v_{k-1}^a\Big|_{\xi=0} = V_k^a(x,\tau) \tag{3.20}$$

for $k \ge 1$. Similarly, boundary conditions at $y = 1$ are given by

$$u_0^r\Big|_{y=1} + u_0^b\Big|_{\eta=0} = U_0^b(x,\tau), \quad v_0^r\Big|_{y=1} = V_0^b(x,\tau), \tag{3.21}$$

$$u_k^r\Big|_{y=1} + u_k^b\Big|_{\eta=0} = U_k^b(x,\tau), \quad v_k^r\Big|_{y=1} + v_{k-1}^b\Big|_{\eta=0} = V_k^b(x,\tau) \tag{3.22}$$

for $k \ge 1$. Note that (3.19) and (3.21) justify boundary conditions for ϕ_{0y} in (3.6).

3.2.3 Leading order equations

Boundary layer at $y = 0$. In the leading order, the boundary layer at $y = 0$ is described by (3.14) for $k = 0$. The condition of decay at infinity (in variable ξ) for p_0^a and the second Eq. (3.14) imply that $p_0^a \equiv 0$. Hence, the first Eq. (3.14) reduces to the heat equation

$$u_{0\tau}^a = \nu u_{0\xi\xi}^a. \tag{3.23}$$

Boundary condition for u_0^a at $\xi = 0$ follows from (3.19) and is given by

$$u_0^a\,|_{\xi=0} = U_0^a(x,\tau) - \phi_{0x}(x,0,\tau). \tag{3.24}$$

The periodic (in τ) solution of Eq. (3.23) must satisfy (3.24) and the condition of decay at infinity.

On averaging Eq. (3.23), we find that $\bar{u}_{0\xi\xi}^a = 0$. The only solution of this equation that satisfies the decay condition at infinity and the boundary condition $\bar{u}_0^a|_{\xi=0} = 0$ (which follows from (3.24) and the fact that $\bar{U}_0^a = 0$ and $\bar{\phi}_0 = 0$) is zero solution. Thus, in the leading order the boundary layer at $y = 0$ is purely oscillatory: $\bar{u}_0^a \equiv 0$.

The normal velocity v_0^a is determined from the third Eq. (3.14) for $k = 0$:

$$v_0^a(x,\xi,\tau) = \partial_x \int\limits_{\xi}^{\infty} u_0^a(x,\xi',\tau)d\xi'. \tag{3.25}$$

Here the constant of integration is chosen so as to guarantee that $v_0^a \to 0$ as $\xi \to \infty$. According (3.13), $v_0^a(x,\xi,\tau)$ enters the first-order term in the expansion and, therefore, $v_0^a\,\big|_{\xi=0}$ gives us the boundary condition for the next approximation of the outer solution. Indeed, in view of (3.20) (with $k = 1$), we have $v_1^r(x,y,\tau)\,\big|_{y=0} = V_1^a(x,\tau) - v_0^a(x,0,\tau)$, so that function $a_1(x,\tau)$ in problem (3.11) is $a_1(x,\tau) = V_1^a(x,\tau) - v_0^a(x,0,\tau)$. Note also that Eq. (3.25) implies that $\bar{v}_0^a \equiv 0$.

Boundary layer at $y = 1$. Exactly the same arguments as above lead to the problem

$$u_{0\tau}^b = \nu u_{0\eta\eta}^b, \tag{3.26}$$

$$u_0^b\,|_{\eta=0} = U_0^b(x,\tau) - \phi_{0x}(x,1,\tau), \quad u_0^b \to 0 \;\; \text{as} \;\; \eta \to \infty. \tag{3.27}$$

Again, it follows from (3.26) and (3.27) that $\bar{u}_0^b \equiv 0$. The normal velocity v_0^b is given by

$$v_0^b(x,\eta,\tau) = -\partial_x \int\limits_\eta^\infty u_0^b(x,\eta',\tau)d\eta'. \tag{3.28}$$

Then it follows from (3.22) (with $k=1$) that b_1 in problem (3.11) is $b_1(x,\tau) = V_1^a(x,\tau) - v_0^b(x,0,\tau)$. Again, (3.28) implies that $\bar{v}_0^b \equiv 0$.

Averaged outer flow. On averaging (3.19) and (3.21) and using the fact that both boundary layers are purely oscillatory and our assumption that $\bar{\mathbf{V}}_0^{a,b} = \mathbf{0}$, we arrive at conclusion that $\bar{\mathbf{v}}_0^r \big|_{y=0} = \mathbf{0}$ and $\bar{\mathbf{v}}_0^r \big|_{y=1} = \mathbf{0}$. This justifies boundary conditions (3.8) and our conclusion that *there is no steady streaming in the leading order of the expansion.*

3.2.4 First-order equations

Oscillatory outer flow. Since functions $a_1(x,\tau)$ and $b_1(x,\tau)$, which appear in problem (3.11), are now known, the problem can be solved, thus giving us $\tilde{\mathbf{v}}_1^r(x,y,\tau)$.

Boundary layer at $y=0$. Consider now Eqs. (3.14) for $k=1$. Again, the condition of decay at infinity for p_1^a and the second Eq. (3.14) imply that $p_1^a \equiv 0$. Hence, we have

$$u_{1\tau}^a = \nu u_{1\xi\xi}^a - V_0^a(x,\tau)\, u_{0\xi}^a. \tag{3.29}$$

Averaging this equation, we find that $\nu \bar{u}_{1\xi\xi}^a = \overline{V_0^a(x,\tau) u_{0\xi}^a}$. Integration over ξ yields

$$\bar{u}_1^a = -\frac{1}{\nu} \int\limits_\xi^\infty \overline{V_0^a(x,\tau) u_0^a(x,\xi',\tau)}\, d\xi'. \tag{3.30}$$

Here the constants of integration are chosen so as to satisfy the condition of decay at infinity. According to (3.20), we have

$$\bar{u}_1^r|_{y=0} = -\bar{u}_1^a|_{\xi=0} = \frac{1}{\nu} \int\limits_0^\infty \overline{V_0^a(x,\tau) u_0^a(x,\xi',\tau)}\, d\xi', \tag{3.31}$$

$$\bar{v}_1^r \big|_{y=0} = 0. \tag{3.32}$$

The oscillatory part of u_1^a, as well as both averaged and oscillatory parts of v_1^a can also be found but are not needed in what follows.

Boundary layer at $y=1$. A similar analysis leads to

$$\bar{u}_1^b = \frac{1}{\nu} \int\limits_\eta^\infty \overline{V_0^b(x,\tau) u_0^b(x,\eta',\tau)}\, d\eta', \tag{3.33}$$

$$\bar{u}_1^r|_{y=1} = -\frac{1}{\nu} \int\limits_0^\infty \overline{V_0^b(x,\tau) u_0^b(x,\eta',\tau)}\, d\eta', \tag{3.34}$$

$$\bar{v}_1^r \big|_{y=1} = 0. \tag{3.35}$$

Averaged outer flow. The first order averaged outer flow is described by the Stokes equations (3.12) subject to the boundary conditions (3.31), (3.32), (3.34) and (3.35). This boundary value problem describes a steady Stokes flow produced by a given distribution of the velocity at the boundary. It will have a non-zero solution provided that at least one of the integrals on the right sides of Eqs. (3.31) and (3.34) is non-zero. In this case, *steady streaming is the effect of first order in ϵ.* This is in contrast with steady streaming produced by vibrating impermeable walls where a non-zero averaged velocity appears in the second order of the expansion. Thus, the steady component of the flow in our problem is much stronger than that in the case of vibrating impermeable walls.

Leading order asymptotic for the averaged flow. To summarise, we have obtained the first non-zero term in the expansion of the steady component of the flow. The averaged velocity field has the form

$$\bar{u} = \epsilon\left(\bar{u}_1^r + \bar{u}_1^a + \bar{u}_1^b\right) + O(\epsilon^2), \quad \bar{v} = \epsilon\,\bar{v}_1^r + O(\epsilon^2)$$

where boundary layer contributions $\bar{u}_1^a$ and $\bar{u}_1^b$ are given by Eqs. (3.30) and (3.33) and where $\bar{\mathbf{v}}_1^r$ is the solution of the Stokes equations that satisfies boundary conditions (3.31), (3.32), (3.34) and (3.35). If we introduce the stream function for the averaged flow $\bar{\psi}$ defined by the standard relations $\bar{u} = \bar{\psi}_y$ and $\bar{v} = -\bar{\psi}_x$, then the corresponding expansion of $\bar{\psi}$ will have the form

$$\bar{\psi} = \epsilon\,\bar{\psi}_1^r + O(\epsilon^2)$$

where $\bar{\psi}_1^r$ is the stream function for $\bar{\mathbf{v}}_1^r = (\bar{u}_1^r, \bar{v}_1^r)$. Note that boundary layer terms do not appear in the leading order of the expansion for $\bar{\psi}$.

We note also that, in our problem, there is no need to consider the Stokes drift as it is the effect of higher order in ϵ.

4 Examples

Below we consider a few simple examples in which the velocity at the walls oscillates harmonically in time. In all the examples below, the tangent velocity at the walls is zero ($U^a = U^b = 0$), and the normal velocity is non-zero ($V^a \neq 0$ and $V^b \neq 0$). Examples with zero normal velocity and non-zero tangent velocity are not considered, as in this case, steady streaming appears in higher order approximations (in the case of half space this problem had been treated by Vladimirov (2008)).

4.1 *Example 1: Standing waves*

Let $\mathbf{V}^a = \cos kx\,\cos\tau\,\mathbf{e}_y$ and $\mathbf{V}^b = \alpha\,\mathbf{V}^a$ where $k = 2\pi/L$ and $\alpha = \pm 1$. This choice corresponds to standing waves of injection/suction applied at the boundaries of the channel ($\alpha = 1$ if the waves are in phase, and $\alpha = -1$ if they have opposite phase). After substitution of $\mathbf{V}^a$ and $\mathbf{V}^b$ in the general formulae of Section 3, we find that

$$\bar{u}_1^r|_{y=0} = \bar{u}_1^r|_{y=1} = -\frac{A(k)}{4\sqrt{2\nu}}\sin(2kx), \quad A(k) \equiv \frac{\cosh(k) - \alpha}{\sinh(k)}. \tag{4.1}$$

Solving the Stokes equations (3.12) with boundary conditions (3.32), (3.35) and (4.1), we obtain

$$\bar{\psi}_1^r = -\frac{1}{4\sqrt{2\nu}}\frac{A(k)}{\sinh(2k) - 2k}\left\{(y-1)\sinh(2ky) + y\sinh\left[2k(1-y)\right]\right\}\sin(2kx). \tag{4.2}$$

Typical streamlines are shown in Fig. 1(a). It is clear from (4.2) that the flow picture is the same for $\alpha = 1$ and $\alpha = -1$, the only difference is in the magnitude of the flow. The latter is determined by $A(k)$. For $\alpha = 1$, A is an increasing function, $A(k) \sim k$ for $k \ll 1$ and $A(k) \to 1$ as $k \to \infty$. For $\alpha = -1$, A is a decreasing function, $A(k) \sim 1/k$ for $k \ll 1$ and $A(k) \to 1$ as $k \to \infty$. So, for all $k > 0$, the magnitude of the steady streaming for $\alpha = -1$ is greater than for $\alpha = 1$. Thus, the steady streaming is stronger when standing waves of suction/injection applied at the walls have opposite phase. Also, in this case the magnitude of the steady streaming increases with the wavelength of the waves.

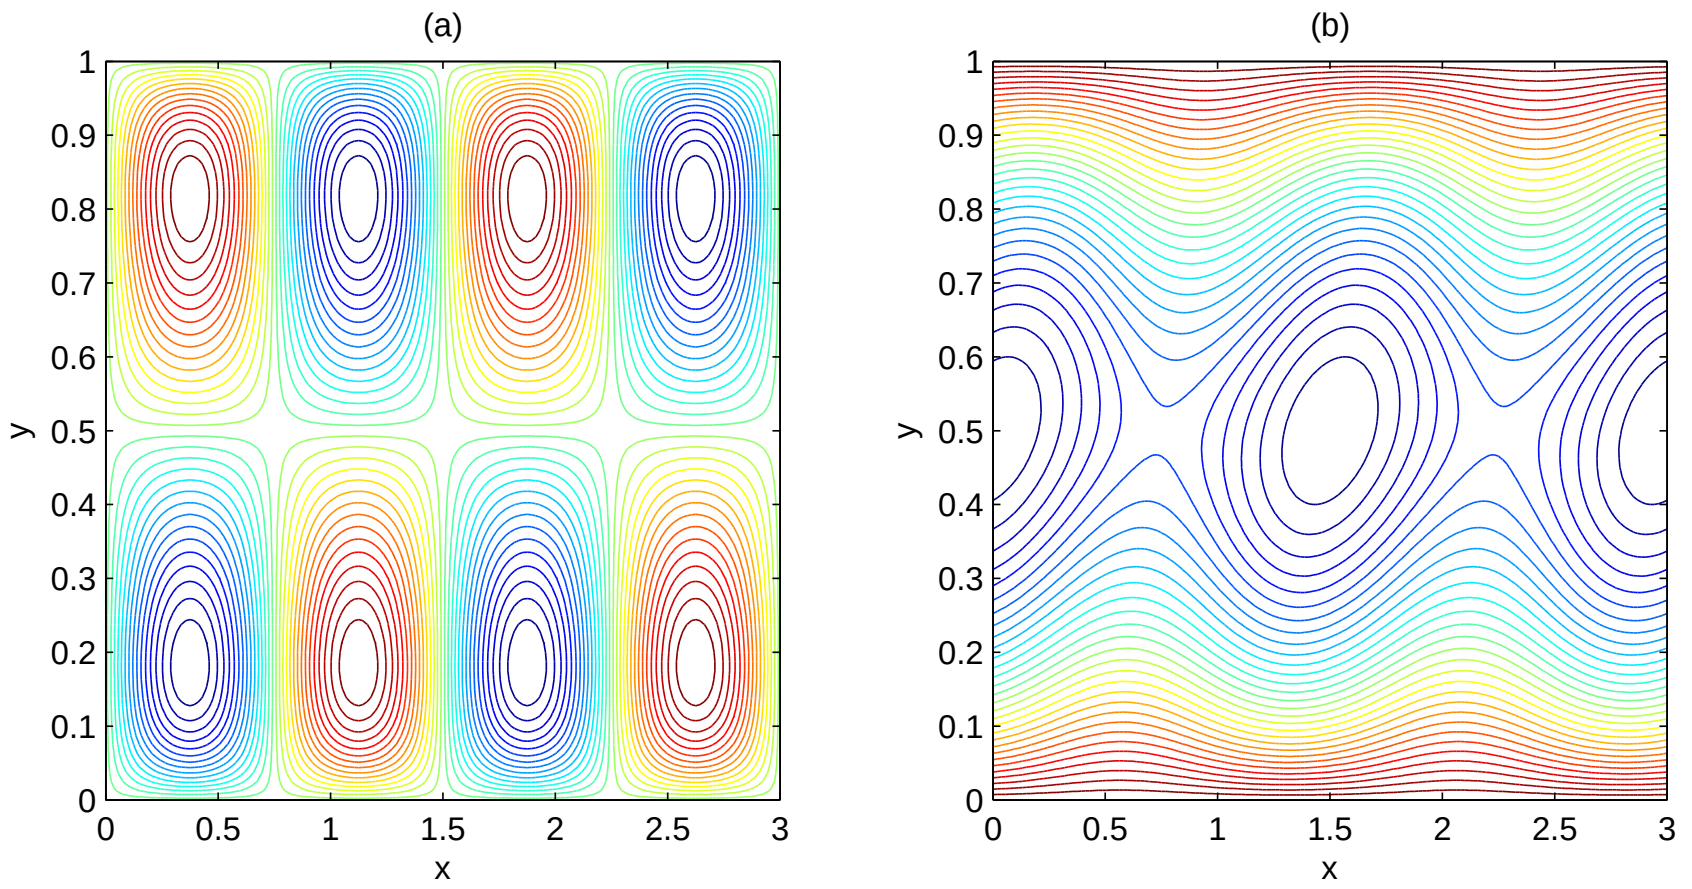

Figure 1: The streamlines $\bar{\psi}_1^r = const$ for $\nu = 1$, $L = 3$ and $\alpha = 1$: (a) standing waves; (b) waves travelling in opposite directions.

4.2 *Example 2: Waves travelling in the same direction*

Let now the velocity at both walls be purely normal and have the form of waves travelling in the direction of the x axis: $\mathbf{V}^a = \cos(kx - \tau)\,\mathbf{e}_y$ and $\mathbf{V}^b = \alpha\,\mathbf{V}^a$ where k and α are the same as in Example 1. Boundary conditions (3.31) and (3.34) take the form

$$\bar{u}_1^r|_{y=0} = \bar{u}_1^r|_{y=1} = -\frac{A(k)}{2\sqrt{2\nu}}. \tag{4.3}$$

where $A(k)$ is given by (4.1). The Stokes equations (3.12) subject to (3.32), (3.35) and (4.3) lead to the constant solution[2]: $\bar{u}_1^r = -A(k)/2\sqrt{2\nu}$, $\bar{v}_1^r = 0$. Thus, the waves travelling in the same direction produce a constant mean flow whose direction is opposite to the direction in which the waves advance. This (somewhat surprising) result agrees with numerical simulations reported in (Hœpffner & Fukagata, 2009). The magnitude of the mean flow is determined by $A(k)$. Properties of $A(k)$ imply that the most efficient way to generate the mean unidirectional flow is to apply suction/blowing in the form of waves travelling in the same direction and having opposite phase.

4.3 *Example 3: Waves travelling in the opposite directions*

Let now the normal velocity at the walls have the form of waves travelling in opposite directions: $\mathbf{V}^a = \cos(kx - \tau)\,\mathbf{e}_y$ and $\mathbf{V}^b = \alpha\,\cos(kx + \tau)\,\mathbf{e}_y$ where k and α are the same as in Examples 1 and 2. Boundary conditions for $\bar{u}_1^r$ reduce to

$$\bar{u}_1^r|_{y=0} = -\frac{1}{2\sqrt{2\nu}}\,\frac{B^-(k,x)}{\sinh(k)}, \quad \bar{u}_1^r|_{y=1} = \frac{1}{2\sqrt{2\nu}}\,\frac{B^+(k,x)}{\sinh(k)} \tag{4.4}$$

where $B^{\pm} = \cosh(k) + \alpha[\cos(2kx) \pm \sin(2kx)]$. The corresponding solution of the Stokes equations is given by

$$\bar{\psi}_1^r = -\frac{1}{2\sqrt{2\nu}}\left[\frac{\cosh(k)}{\sinh(k)}\,y(1-y) + D^-\,y\sinh[2k(1-y)] + D^+(1-y)\sinh(2ky)\right] \tag{4.5}$$

---

[2] The Stokes equations (3.12) also admit solutions with a nonzero pressure gradient $\nabla\Pi_1 = c_0\mathbf{e}_x$ ($c_0 = const$), which are not considered here, because this would be equivalent to a modification of our problem, allowing the presence of a weak $O(\epsilon^3)$ pressure gradient.

where

$$D^{\pm}(k,x) = \frac{\alpha}{\sinh(k)} \left[\frac{\cos(2kx)}{\sinh(2k)+2k} \pm \frac{\sin(2kx)}{\sinh(2k)-2k} \right].$$

Typical streamlines of the flow (4.5) for $\alpha = 1$ are shown in Fig. 1(b). In the case of $\alpha = -1$, the flow picture is the same except that it is shifted along x axis by $L/4$ (this can be deduced directly from (4.5)).

5 Conclusions

We have considered incompressible flows in a channel between two parallel permeable walls and constructed an asymptotic expansion of solutions of the Navier-Stokes equations in the limit when the amplitude of displacements of fluid particles near the walls is mich smaller than both the width of the channel and the thickness of the Stokes layer. The asymptotic procedure is based on the Vishik-Lyusternik method and can be used to construct as many terms of the expansion as necessary. In the leading order, the averaged flow is described by the stationary Stokes equations subject to the boundary conditions that are determined by the boundary layers at the walls. The key difference between the present expansion and the asymptotic theories of steady streaming induced by vibrating impermeable boundaries is that, in our study, the magnitude of the steady streaming is $O(\epsilon)$, which is much bigger than $O(\epsilon^2)$ steady streaming in the case of impermeable walls.

The general formulae have been applied to three particular examples of steady streaming induced by blowing/suction at the walls in the form of standing and travelling plane waves. In the case of standing waves, the averaged flow has the form of a double array of vortices (see Fig. 1(a)). For short waves the vortices are concentrated near the walls, while long waves produce vortices that fill the entire channel.

If the normal velocity at the walls have the form of plane harmonic waves which travel in the same direction, the induced steady flow is a constant unidirectional flow whose direction is opposite to the direction in which the waves travel. This is different from the case of the steady streaming generated by vibrations of impermeable walls where the induced flow had the same direction as the travelling wave. As far as we are aware, this was first observed in numerical simulations performed by Hœpffner & Fukagata (2009) .

If the normal velocities at the walls have the form of plane waves traveling in opposite directions, the averaged flow is a superposition of a shear flow with a linear velocity profile and a periodic array of vortices (‘cat’s eyes’) in the center of the channel. When the wavelength is small, the vortices are weak. Their intensity and size monotonically grow with the wavelength and eventually they fill the entire gap between the walls.

There are many open problems in this area. In particular, it is not clear how the present theory can be extended to the case of $R_s \sim 1$. Although the problem does not involve a moving boundary which, in general, simplifies things, there is a technical difficulty of a different sort. It is related to the leading order boundary layer equations for $R_s \sim 1$ which are difficult to solve analytically[3]. This is a subject of a continuing investigation.

Acknowledgments. I am grateful to A. B. Morgulis and V. A. Vladimirov for stimulating discussions.

References

Carlsson, F. , Sen. M. & Löfdahl, H. A. 2005 Fluid mixing induced by vibrating walls. *European J. Mech. B/Fluids*, **24**, 366–378.

---

[3] Note that in the case of vibrating impermeable walls and $R_s \sim 1$, the same equations (but with different boundary conditions) can be solved analytically (see Ilin & Morgulis, 2011).

Hœpffner, J. & Fukagata, K. 2009 Pumping or drag reduction? *J. Fluid Mech.*, **635**, 171–187.

Ilin, K. & Sadiq, M. A. 2010 Steady viscous flows in an annulus between two cylinders produced by vibrations of the inner cylinder. E-print: arXiv:1008.4704v2 [physics.flu-dyn].

Ilin, K. & Morgulis, A. 2011 Steady streaming between two vibrating planes at high Reynolds numbers. E-print: arXiv:1108.2710v1 [physics.flu-dyn].

Jaffrin, M. Y. & Shapiro, A. H. 1971 Peristaltic pumping. *Ann. Rev. Fluid Mech.*, **3**, 1337.

Lighthill, J. 1978 Acoustic Streaming. *J. Sound and Vibration*, **61**(3), 391418.

Nayfeh, A. H. 1973 Perturbation methods. John Wiley & Sons, New York - London - Sydney.

Riley, N. 1967 Oscillatory Viscous Flows. Review and Extension. *J. Inst. Maths Applics*, **3**, 419–434.

Riley, N. 2001 Steady Streaming. *Ann. Rev. Fluid Mech.*, **33**, 4365.

Selverov, J. P. & Stone, H. A. 2001 Peristaltically driven channel flows with applications towards micromixing. *Phys. Fluids*, **13**(7), 1838–1859.

Trenogin, V. A. 1970 The development and applications of the Lyusternik-Vishik asymptotic method. *Uspehi Mat. Nauk* **25**, no. 4, 123–156.

Vladimirov, V. A. 2008 Viscous flows in a half space caused by tangential vibrations on its boundary. *Stud. Appl. Math.*, **121**(4), 337–367.

Wilson,D. E. & Panton, R. L. 1979 Peristaltic transport due to finite amplitude bending and contraction waves. *J. Fluid Mech.*, **90**, 145–159.

Yi, M., Bau, H. H. & Hu, H. 2002 Peristaltically induced motion in a closed cavity with two vibrating walls. *Phys. Fluids*, **14**(1), 184–197.